



# M319

## Single acting solenoid




**Description:**

- Pump/Motor/Reservoir/Valve
- Check Valve
- 2-Way/2-Position Normally Closed Solenoid Operated Lowering Valve
- Externally Adjustable Relief Valve
- 3/8" BSP Outlet
- Horizontal Mounting Standard


**Option:**

Push-button pendant control  
c/w 2 metres cable

**Model: 07993**

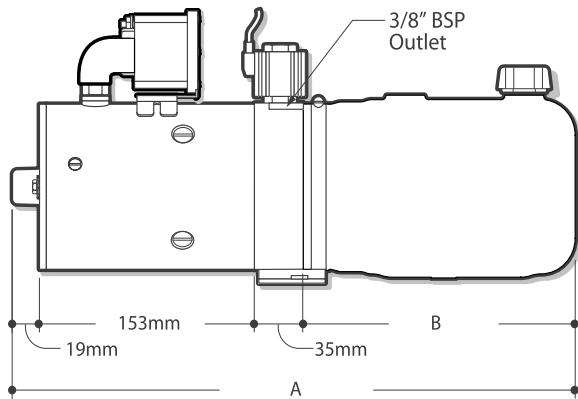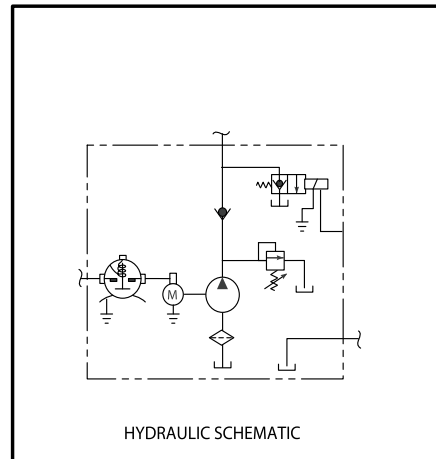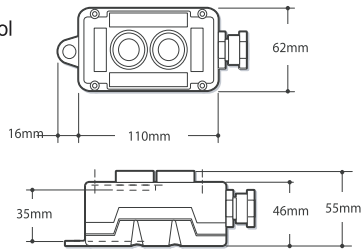

SIDE VIEW

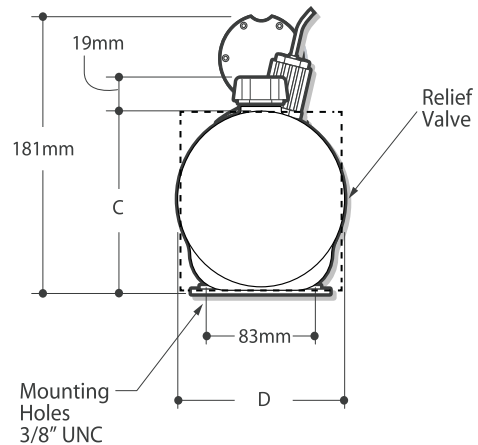

END VIEW

**ORDERING CODE: M319.14157.12V**

12V or 24V DC

| TANK  | VOLUME<br>litres | TYPE<br>material / shape | A   | B   | C   | D   |
|-------|------------------|--------------------------|-----|-----|-----|-----|
|       |                  |                          | mm  |     |     |     |
| 14157 | 3.2              | Poly □                   | 461 | 254 | 152 | 165 |
| 6148  | 3.8              | Steel ○                  | 486 | 279 | 159 | 153 |
| 14166 | 4.7              | Poly □                   | 486 | 279 | 184 | 170 |
| 6864  | 8.3              | Steel □                  | 658 | 451 | 159 | 184 |
| 6888  | 11.7             | Steel □                  | 811 | 604 | 159 | 184 |