


HYDRASTAR TEST PROCEDURES

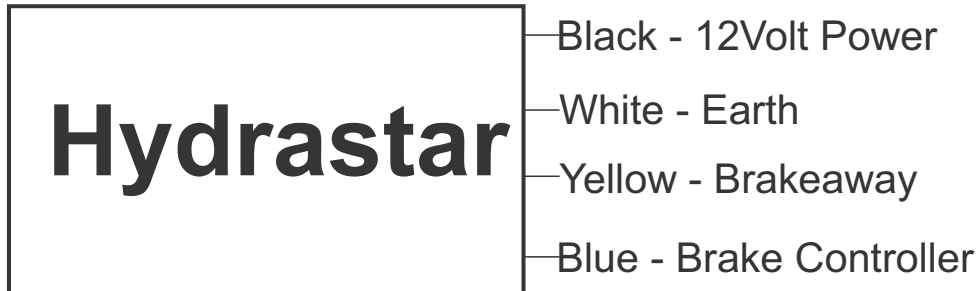

Use a 12 Volt battery source, isolate the wires from the Hydrastar when conducting the BATTERY Test

Test Hydrastar units

- Connect Black to + Battery
- Connect White - Battery

Test Procedures

- To Test break away circuit - Touch yellow to + Battery (pump should run)
- To Test brake control circuit - Touch Blue to + Battery (pump should run)

NOTE DO NOT TOUCH BOTH YELLOW AND BLUE AT THE SAME TIME

INDUSTRY LEADING 5 YEAR FRAME WARRANTY.

... so you can ALWAYS trust a Swiftco.